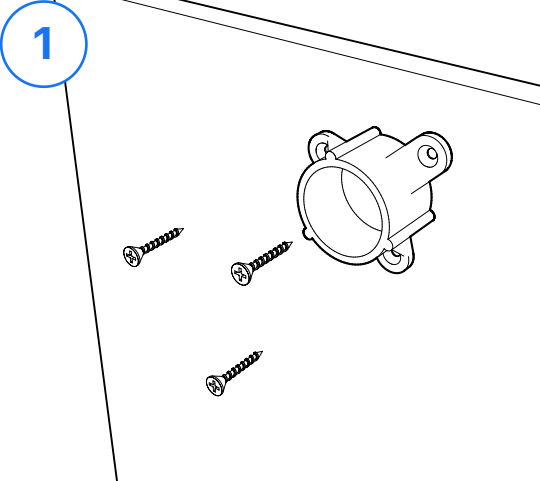
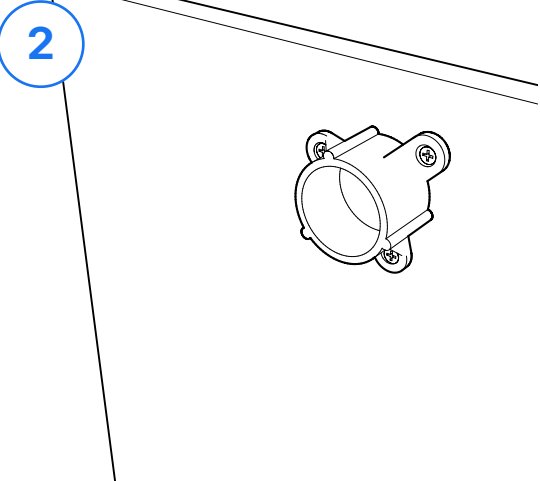
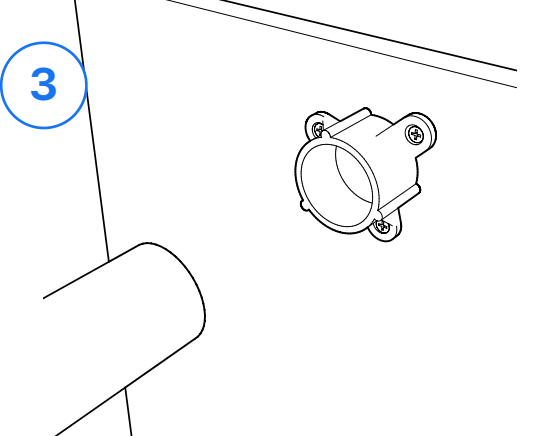
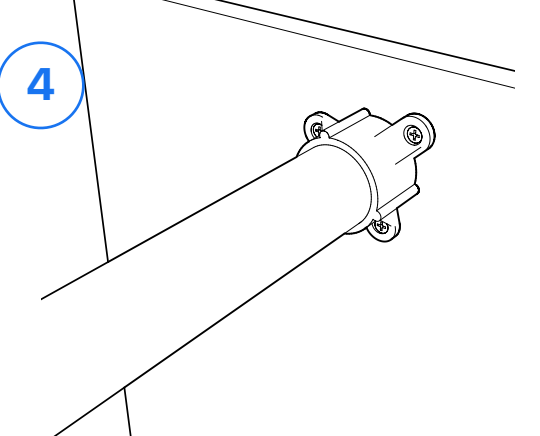


## PRODUCT INSTRUCTIONS

# Table Screw Cap

FORMUFIT PVC Table Caps connect PVC Pipe to flat material surfaces such as wood, drywall and masonry. To connect this product to PVC pipe, follow the instructions shown below.

### Assembly

	
<p>1</p> <p>Position the Table Cap against a flat surface. Use the appropriate fasteners for the surface in the tapered holes on the tabs.</p>	<p>2</p> <p>Secure into place using a screwdriver, hammer or power drill/driver.</p>
	
<p>3</p> <p>Line up a segment of the same size PVC Pipe and insert it into the socket of the Table Cap.</p>	<p>4</p> <p>Insert the pipe into the Table Cap. PVC cement will almost always be required for a secure connection between Table Cap and Pipe.</p>

## Adjustment and Use

The table cap can be secured using a large assortment of fasteners, such as screws (drywall, wood, masonry, etc.), nails or rivets. The fastener chosen must have a shaft diameter of no more than 0.20 in. (1/8"). Typically #10 size fasteners are the ideal solution for Table Caps of any size.

## Securing

For permanent and strong connections, it is recommended to use PVC cement/solvent to attach the PVC pipe and the folding adapter. You can also use screws to temporarily connect the pipe and coupler together.